B. van Bloklandstraat 17
5042 PM Tilburg

Postbus 1155
5004 BD Tilburg

Telefoon: 013 - 465 75 75
Telefax: 013 - 465 75 70

Internet: www.vekopak.nl
E-mail: info@vekopak.nl

vekopak
drukkerij kartonnage

GENERAL REPRO SPECIFICATIONS

PRINT PROCESS

Print Process	Offset
Maximum numbers of Colours	7 - (when using Coldfoil max 5 colours)
Colour print sequence	Black - Cyaan - Magenta - Yellow Metalics (inkt / foil) are printed first
Type of inkt	Conventional & UV (Food grade)
Type of varnisch	Glossy / Matt / Spot-UV / Drip-off / Soft Touch
Profile	Fogra 39 / cmyk modus
Substrates that can be printed	Carton Board

COMPOSITION OF PREPRESS FILES

Software	Adobe Creative Cloud / Packz	
Resolution of images	300 dpi	
Minimum dot in file (%)	2%	
Maximum dot in file (%)	100%	
Minimum size for text (pt)	Positive 4,5pt	Negative 5,5pt
Minimum line thickness (pt)	Positive 0,25pt	Negative 0,30pt
Bleed (mm)	3mm	
Trapping (pt)	0,25pt (centered - Provided by Vekopak)	
Pull-back white (pt)	-0,125pt (Provided by Vekopak)	
Barcode	BWR 15 Micron	Minimum size 80% (preferably Black)
Total inkt coverage(%)	330%	

ADDITIONAL INFORMATION

Comments	BRC-Certified / FSC-Certified
Pre-press	make spot-uv / Embossing in seperate layer, and save the file and HR pdf incl layer

illustrator

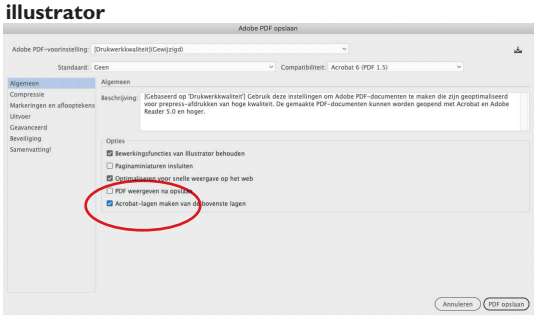

indesign

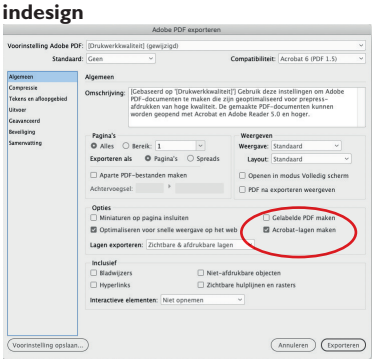

if artwork deviates from the above specs and cannot be produced, adjustment to the quote is necessary